

The strong link in the cold chain



1→100m³

ASSESS YOUR REFRIGERATION
REQUIREMENT

STRAIGHT TRUCK OFFER





A refrigeration requirement

→ FRIGO CONVERSION

1 Single/Multi

☐ Single temperature

☐ Multi-temperature - Number of compartments

2 Transport temperature desired

☐ Isothermal (insulation only) - Class RI or NI

☐ Positive cold (0 to +12°C) - Class A

☐ Negative cold (-20°C to +12°C) - Class C

3 Cooling Unit

☐ With 230 V mains supply

☐ With 400 V mains supply

(temperature drop of the vehicle connected to the electrical network)

☐ With reinforced 230 V mains power

☐ With reinforced 400 V mains power

(periodic use as auxiliary cold room with vehicle connected to the electrical network, must remain for occasional use)

☐ Road only (no possibility of connecting to mains power)

4 Door opening frequency

☐ Less than 4 per hour

☐ More than or equal to 4 per hour

5 Products transported

☐ Fresh

☐ Sea food

☐ Frozen

☐ Pharmacy

☐ Meat

☐ Flowers

☐ Greengrocery - Fruit

☐ Other

DOCUMENT TO BE COMPLETED TO SPEED YOUR REQUEST FOR AN ESTIMATE/ORDER AND TO BE SENT TO:

LAMBERET - Customer Service - Tel.: +33 (0)3 85 30 85 30 - Email: communication@lamberet.fr



Customer introduction

→ THE RIGHT QUESTIONS TO ASK

1 Who is the user?

2 What is his trade?

3 What is his catchment area?

4 Working hours?

From : to :

or tick
the working hours...

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

5 What does he transport?

6 What is the packaging?

☐ 80x120 pallets

☐ 100x200 pallets

☐ Rolls X

☐ Parcels

☐ Bulk

☐ Other

The body characteristics

7 Loading length and width desired

Length (m)

Width (m)

8 Necessary height

Height (m)

9 Loading mode (dock, tailgate, ramps, etc.)


10 Type of openings required and their position

DOCUMENT TO BE COMPLETED TO SPEED YOUR REQUEST FOR AN ESTIMATE/ORDER AND TO BE SENT TO:

LAMBERET - Customer Service - Tel.: +33 (0)3 85 30 85 30 - Email: communication@lamberet.fr

Assess the basic vehicle

→ POSSIBLE CONFIGURATIONS

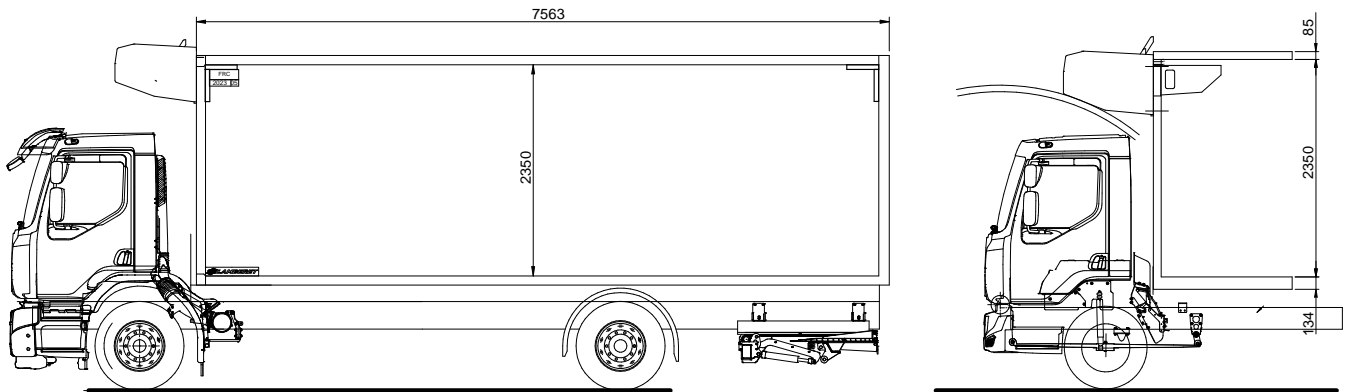

Essential elements for performing a load and tilting distribution study:

- Supply of a standard or preferably customised technical data sheet
- Body cell definition: Length, height and width of the body cell, type of rear opening
- Unit and tailgate: cooling unit brand and model, tailgate brand and model
- Specific layouts (longitudinal bulkhead side door, hanging space, etc.)
- Maximum height overall

Specify

1 Make

2 Model

3 Version

(length/height)

Cab colour (if other than white)

Chassis number

Dealer order No.

DOCUMENT TO BE COMPLETED TO SPEED YOUR REQUEST FOR AN ESTIMATE/ORDER AND TO BE SENT TO:

LAMBERET - Customer Service - Tel.: +33 (0)3 85 30 85 30 - Email: communication@lamberet.fr

→ PARAMETERS FOR VEHICLE SPECIFICATIONS

1 Type

☐ Frigoline City <12T

☐ Frigoline HD <16T

☐ Frigoline HD <32T

2 Year of chassis manufacture

3 GVWR type (kg)

☐ Awaiting information

☐ 7 → 12T

☐ 13T → 19T

☐ ≥19T

4 Axle drive wheels

☐ 4 x 2

☐ 6 x 2

☐ 8 x 2

☐ Other

Wheelbase axles 1 to 2

m

Axles 2 to 3 centre distance

m

Chassis beam length

At least commercial body length + 100 m: m

5 Cab type

☐ Tilting, short

☐ Tilting, medium

☐ Tilting, deep

6 Deflector

cab roof ☐ With ☐ Without

side ☐ With ☐ Without

7 Lights

Cab clearance

☐ With, manufacturer origin

☐ Manufacturer predisposition

☐ Not supplied, manufacturer origin

side

☐ With, manufacturer origin

☐ Not supplied, manufacturer origin

8 Engine air intake

☐ With, low

☐ With, high

☐ With, high side

☐ Not applicable

☐ Without

9 Wheel extensions

Front under cab

- ☐ With, manufacturer origin
☐ With, manufacturer origin, can be unhooked
☐ With, manufacturer origin, Frigo specifics

Rear

- ☐ With, manufacturer origin
☐ Not supplied, manufacturer origin

10 Cyclist side guards

- ☐ With, manufacturer origin ☐ Not supplied, manufacturer origin

11 Provision for towing

- ☐ With, manufacturer origin ☐ Not supplied, manufacturer origin

12 Chassis voltage

- ☐ 12 V ☐ 24 V ☐ 48 V

13 Speed reducer

- ☐ With ☐ Without

14 Engine power

- ☐ NGC/NGV ☐ Hydrogen ☐ Diesel
☐ LNG ☐ Electric

15 Engine type

.....

16 If the cooling unit is electrically driven or generator

Depollution standard: ☐ Euro VI ☐ Euro VII ☐ Other.....

Engine name:

Engine power:

NB. Engine cylinders: ☐ 4 ☐ 5 ☐ 6 ☐ 8

Engine displacement:

17 Gearbox

- ☐ BVA (automatic gearbox) ☐ BVM (manual gearbox) ☐ BVR (gearbox)

18 Liftgate

- ☐ Folding ☐ Retractable ☐ 2 500 kg
☐ 1 500 kg ☐ 2 000 kg ☐ 2 000 mm
☐ 1 700 mm ☐ 1 800 mm
☐ Signal lighting ☐ Rollstop

Other information

.....

DOCUMENT TO BE COMPLETED TO SPEED YOUR REQUEST FOR AN ESTIMATE/ORDER AND TO BE SENT TO:

LAMBERET - Customer Service - Tel.: +33 (0)3 85 30 85 30 - Email: communication@lamberet.fr

Assess the conversion

The GVWR standards with their lengths and associated equipment:

→ 12T	15 pallets L6545 HI2350 CARRIER cooling unit Supra 850	Tailgate DHSM15 1T5
→ 16T	18 pallets L7720 HI2350 CARRIER cooling unit Supra 1150	Tailgate DHSM15 1T5
→ 19T	21 pallets L8985 HI2450 CARRIER cooling unit Supra 1250	Tailgate DHSM20 2T
→ 26T	21 pallets L8985 HI2450 CARRIER cooling unit Supra 1250	Tailgate DHSM20 2T

External dimension of body cells depending on the number of pallets


Europal	12		13		14		15		16		17	
Config.	SINGLE	MULTI	SINGLE	MULTI	SINGLE	MULTI	SINGLE	MULTI	SINGLE	MULTI	SINGLE	MULTI
Ext. width	5115	5325	5525	5725	5935	6135	6335	6545	6745	6945	7155	7355

Europal	18		19		20		21		22		23		24
Config.	SINGLE	MULTI	SINGLE	MULTI	SINGLE	MULTI	SINGLE	MULTI	SINGLE	MULTI	SINGLE	MULTI	SINGLE
Ext. width	7555	7765	7965	8165	8375	8575	8775	8985	9185	9385	9595	9795	9995

Notes

→ VIDEO ASSISTANCE

Lamberet makes short videos available to you on its YouTube channel:
<https://www.youtube.com/LamberetSAS>

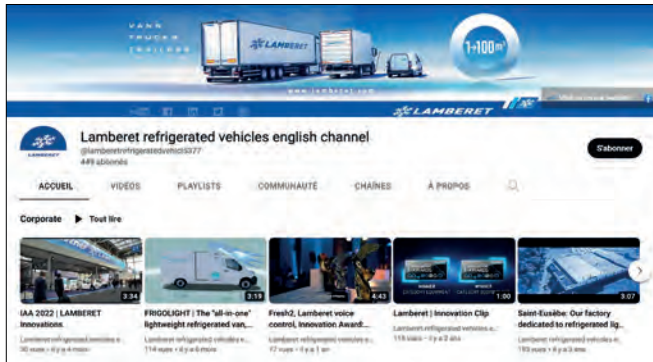

→ UV CONFIGURATIONS POSSIBLE

Conversion technical data sheets available on our website:
www.lamberet.fr > Range tab > Choice by ranges

A screenshot of the Lamberet website's product page for the 'RIGID FRIGOLINE CITY 7 > 12t'. The page features a large image of the truck and a sidebar with 'Benefits' and 'Downloads' sections. The 'Downloads' section is circled in red. Below the main image, there are several smaller images of different truck configurations. At the bottom, there is a navigation bar with various truck types and a list of specific models with their capacities.

RIGID FRIGOLINE CITY 7 > 12t
ISOTHERMAL-REFRIGERATED
ADD-ON BODY 15 to 40 M³

Benefits

- > Gain in payload of up to 10%
- > Enhancing design with integral aluminium moulding
- > Available with swing or sliding side door
- > 4 interior usable widths, 2100, 2210, 2310 and 2490 mm
- > Compatible with the Distro+ pneumatic curtain

Downloads

- > Frigoline City Brochure
- > Frigoline City Video

Need a quote or contact?

Home > Range > RIGIDS > RIGID FRIGOLINE CITY 7 > 12t

HEAVY VEHICLES RIGIDS

- RIGID FRIGOLINE CITY BEEF 7 > 12t | 15 to 40 m³
- RIGID FRIGOLINE CITY 7 > 12t | 15 to 40 m³
- CURTAIN FRAME RIGID HD Distro+ 12 > 32t | 27 to 68 m³
- RIGID FRIGOLINE HD 12 > 32t | 27 to 68 m³
- NITROGEN RIGID HD | 12 to 68 m³